

Allett Regal large area single cylinder mower


- Ideal for cricket pitches, sports grounds and other large, open grass areas
 - Available in a choice of 914mm (36in) and 1067mm (42in) cutting widths
 - Hydrostatic drive gives infinitely-variable working speeds and grass clip rates
 - Regarded by many groundsman as the ultimate single cylinder sportsfield mower

Regal 42


Regal 36
shown with optional trailing seat

Acclaimed for its build quality, workrate and ease of operation, the Allett Regal has been setting high standards for many years on sports grounds, public parks and other large, open areas of high-profile formal and ornamental turf. A combination of power steering and lever-operated hydrostatic drive in both forward and reverse makes the machine very easy to manoeuvre and use. The ability to select infinitely-variable forward and reverse speeds is enhanced by the Regal's added advantage of having an unlimited clip rate that can be set to suit the surface and its application.


A three-section, rubber-covered rear roller provides positive traction on turf and minimal noise when crossing hard surfaces. Internally, the roller is fitted with hardened steel differential gears running in a sealed oil bath for a long, trouble-free life. Adjustment of both height of cut and bedknife to cylinder settings can be made quickly and easily, ensuring that the Regal produces an unrivalled finish on your turf at all times.



Independent power steering levers provide superb manoeuvrability in and out of work.



Cutting cylinder engagement lever – pull up to engage, push forward to disengage.

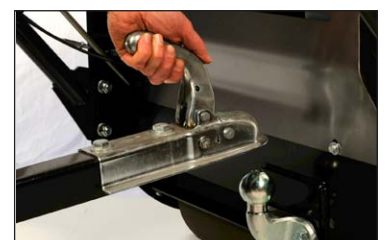

Trailer-type ball hitch allows quick attachment and removal of the optional trailing seat.

Allett Regal large area single cylinder mower

ALLETT REGAL SPECIFICATIONS		
	Regal 36	Regal 42
Working width	914mm (36in)	1,067mm (42in)
Overall width	1,118mm (44in)	1,270mm (50in)
Engine	Honda GX340	
Power output (net)	8kW (10.7hp) @ 3,600 rpm	
Transmission	Eaton Model 11 hydrostatic drive (forward and reverse)	
Steering	Power-assisted, independent lever-operated	
Cutting cylinder	159mm (6 ¹ / ₄ in) diameter with 6 blades and greaseable bearings	
Height of cut	Adjustable from 6.5mm to 44.5mm (1/4in to 1 ³ / ₄ in)	
Rate of cut	Variable to suit surface requirements	
Cylinder engagement	Handle-mounted lever engaging triple V belts via rods	
Rear roller	Three-piece rubber-covered steel roller with differential in oil bath	
Front roller	All-steel with sealed end-bearings	
Handlebar	Adjustable with anti-vibration mountings	
Grassbox	Moulded plastic with steel reinforcing strip	
Weight	352kg (702lb)	376kg (744lb)
Overall height	1,016mm (40in)	
Overall length	2,083mm (82in)	
Options	Trailing seat	

Allett pursues a policy of continuous development and reserves the right to alter the specification of any Allett machine without notice or obligation.

For more information or a no-obligation demonstration of any Allett machine on your turf, please contact your local appointed Allett dealer or the sales department at Allett Mowers' head office. Full contact details for appointed Allett dealers can be found on the Allett website.